


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1162	A	INITIAL RELEASE	TJD	8-06

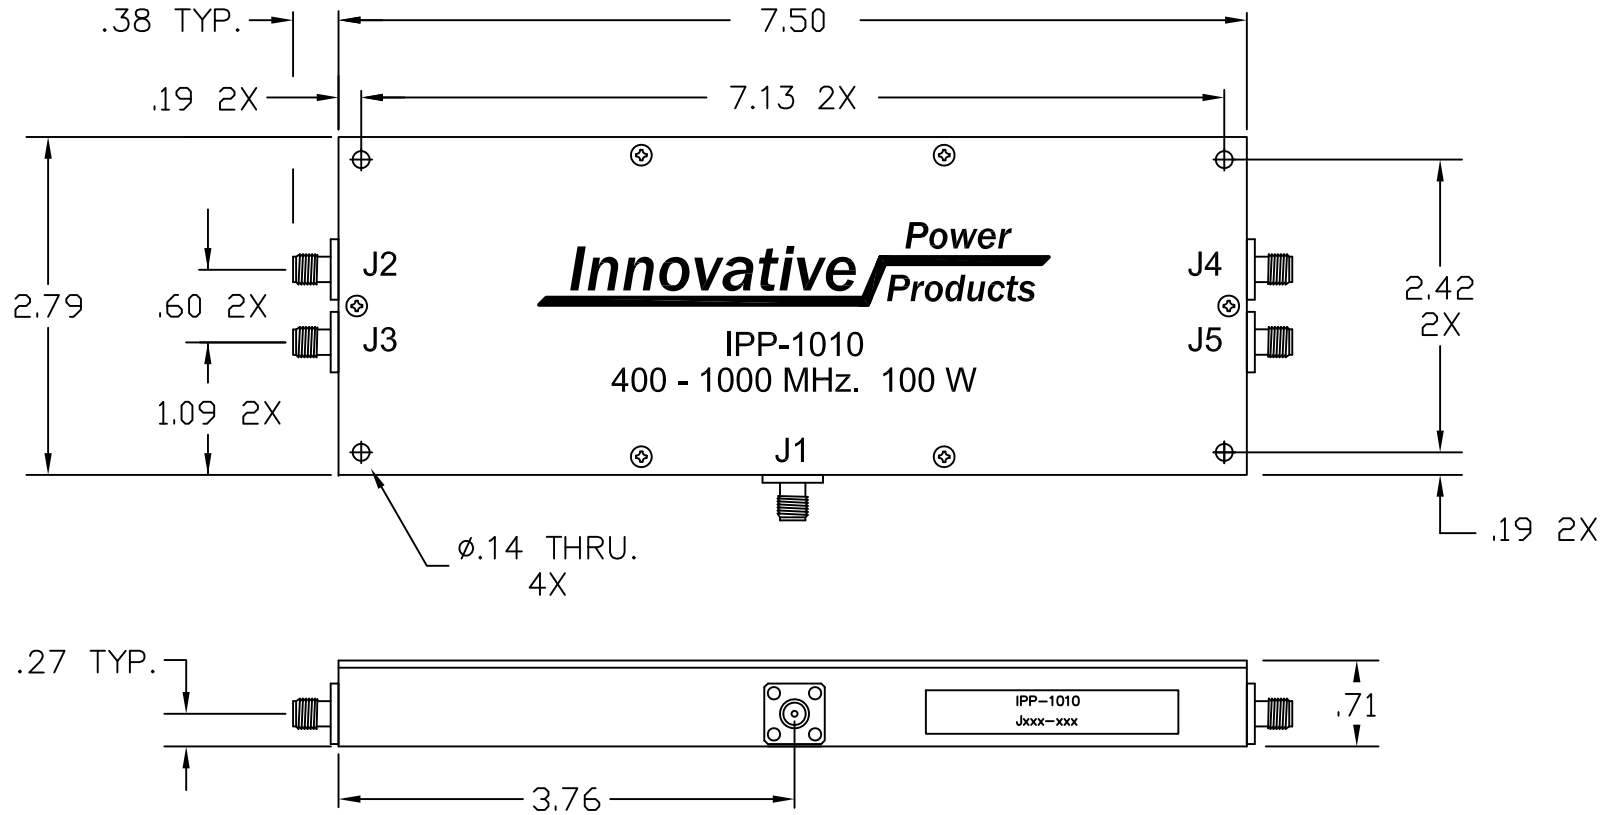

NOTES

1. CONNECTOR: J1 - J5 TYPE SMA-F

ELECTRICAL SPECIFICATIONS

FREQUENCY: 400 - 1000 MHz.
 INSERTION LOSS: < 0.6dB
 VSWR: < 1.30:1
 PHASE BALANCE: < 5°
 ISOLATION: > 10dB
 AMPLITUDE BALANCE: < 0.25dB
 POWER: 100 WATT

MATERIAL	AL. ALLOY	DWN	DG	DATE	8-06	Innovative Power Products		
	6061-T651	ENG	TJD	DATE	8-06			
FINISH	CHEM FILM	MANUF	TP	DATE	8-06	TITLE		
	CLEAR IRRIDITE	CAGE CODE: 437R2			OUTLINE			
TOLERANCE	.XX ±.02	SHEET	OF	SCALE	2:1	4 WAY COMBINER, 400 - 1000 MHz 100 WATT		
	.XXX ±.010	1	1			SIZE	P/N	IPP-1010
	ANG. ±1/2°					B		REV. A