


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1389	A	INITIAL RELEASE	TJD	1-08

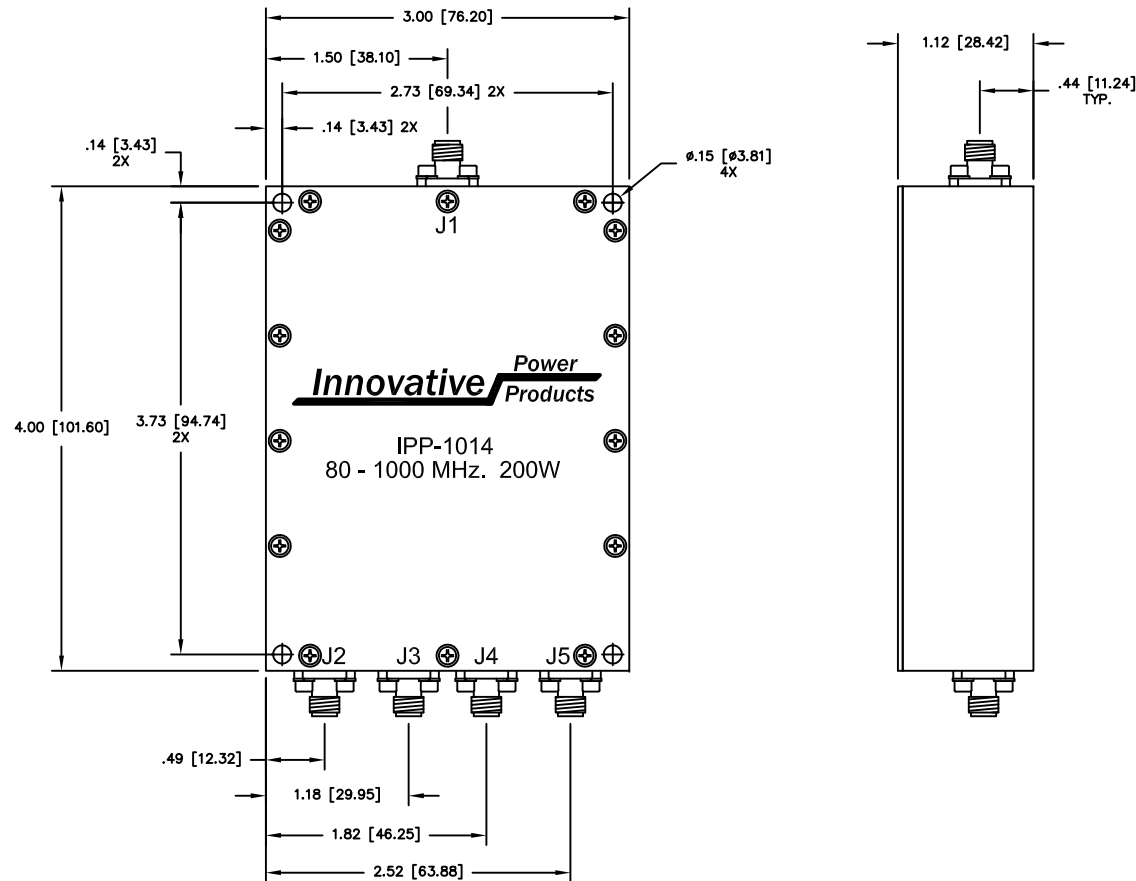

NOTES:

- CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	80 - 1000 MHz.
INSERTION LOSS:	< 0.75 dB
VSWR:	< 1.30:1
PHASE BALANCE:	$\pm 5^\circ$
POWER:	200 WATT
ISOLATION:	18dB
TEMPERATURE:	-55°C TO 85°C

MATERIAL	AL. ALLOY 6061-T651	DWN	DG	DATE	1-08	Innovative Power Products
FINISH	CHEM FILM CLEAR IRRIDITE	ENG	TJD	DATE	1-08	
TOLERANCE	.XX $\pm .02$.XXX $\pm .010$ ANG. $\pm 1/2^\circ$	MANUF	TP	DATE	1-08	
		CAGE CODE: 437R2		TITLE		OUTLINE
		SHEET	OF	SCALE	1:1	4 - WAY 80 - 1000 MHz 200 WATT
		1	1			SIZE P/N
						IPP-1014
						REV. A