


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1389	A	INITIAL RELEASE	TJD	1-08
1622	B	CHANGE ISOLATION	DG	11-08

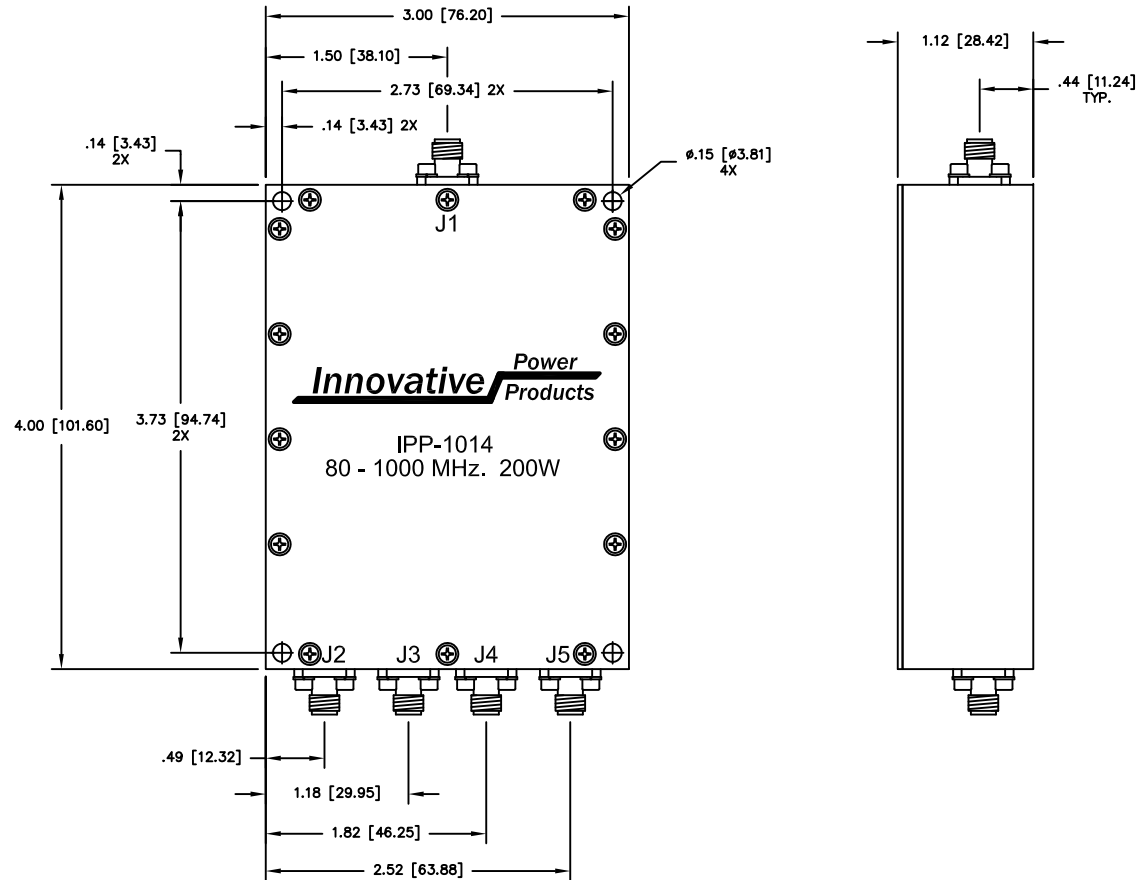

NOTES:

1. CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.

ELECTRICAL SPECIFICATIONS

FREQUENCY: 80 - 1000 MHz.  
 INSERTION LOSS: < 0.75 dB  
 VSWR: < 1.30:1  
 PHASE BALANCE: ±5°  
 POWER: 200 WATT  
 ISOLATION: > -12dB 80-125 MHz  
 > -13dB 125-1000 MHz  
 TEMPERATURE: -55°C TO 85°C

MATERIAL	AL. ALLOY	DWN	DG	DATE	1-08			
	6061-T651	ENG	TJD	DATE	1-08			
FINISH	CHEM FILM	MANUF	TP	DATE	1-08	TITLE		
	CLEAR IRRIDITE	CAGE CODE: 437R2			4 - WAY 80 - 1000 MHz 200 WATT			
TOLERANCE	.XX ±.02	SHEET	OF	SCALE	1:1	SIZE	P/N	REV.
	.XXX ±.010					B	IPP-1014	B
	ANG. ±1/2°	1	1					