


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1481	A	INITIAL RELEASE	DG	5-08
1505	B	REVISE ISOLATION SPECIFICATION	DG	8-08

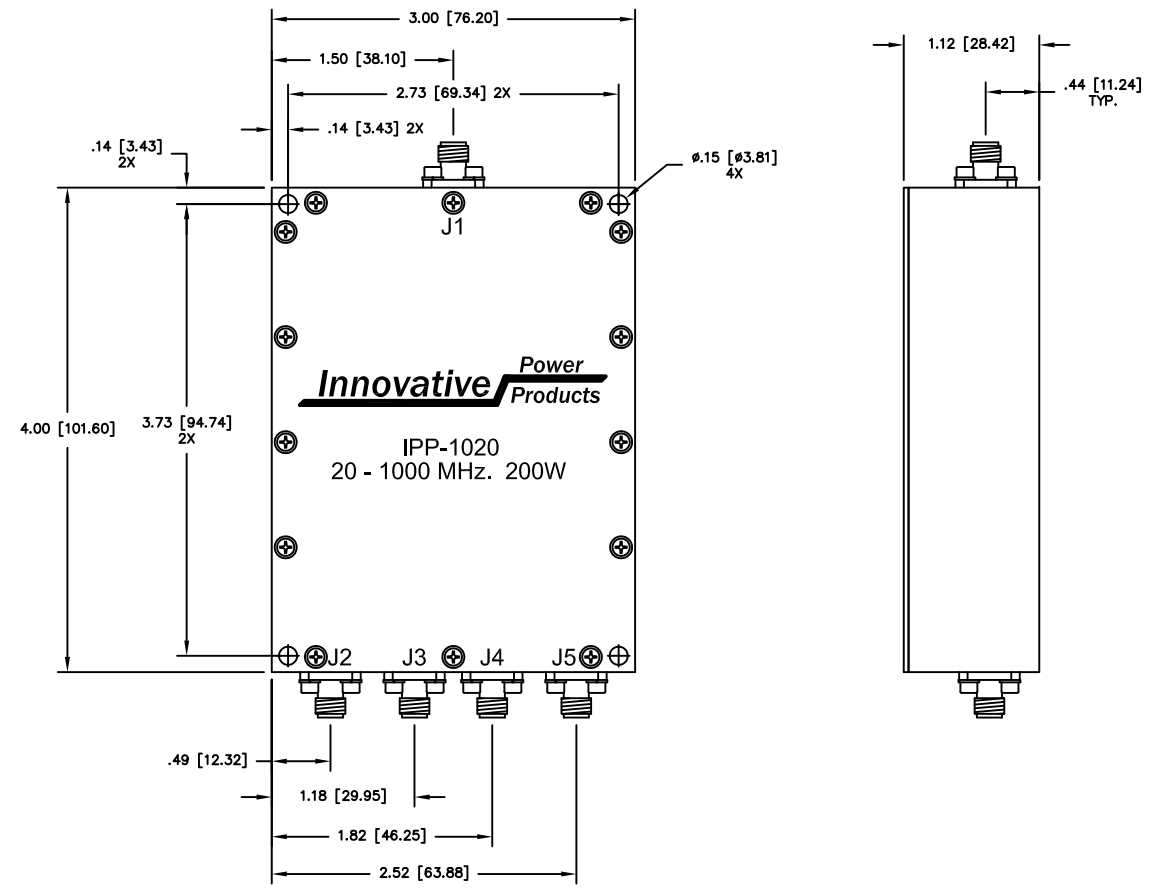

NOTES:

- CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	20 - 1000 MHz.
INSERTION LOSS:	< 0.75 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±5°
POWER:	200 WATT
ISOLATION:	>12 dB 20-125 MHz >15 dB 125-1000 MHz
TEMPERATURE:	-55°C TO 85°C

MATERIAL	AL. ALLOY	DWN	DG	DATE	5-08				
	6061-T651	ENG	TJD	DATE	5-08				
FINISH	CHEM FILM CLEAR IRRIDITE	MANUF	TP	DATE	5-08	TITLE			
		CAGE CODE: 437R2			4 - WAY 20 - 1000 MHz 200 WATT				
TOLERANCE	.XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET OF	1 1	SCALE	1:1	SIZE	P/N	IPP-1020	REV.
						B			B