


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1662	A	INITIAL RELEASE	DG	12-08

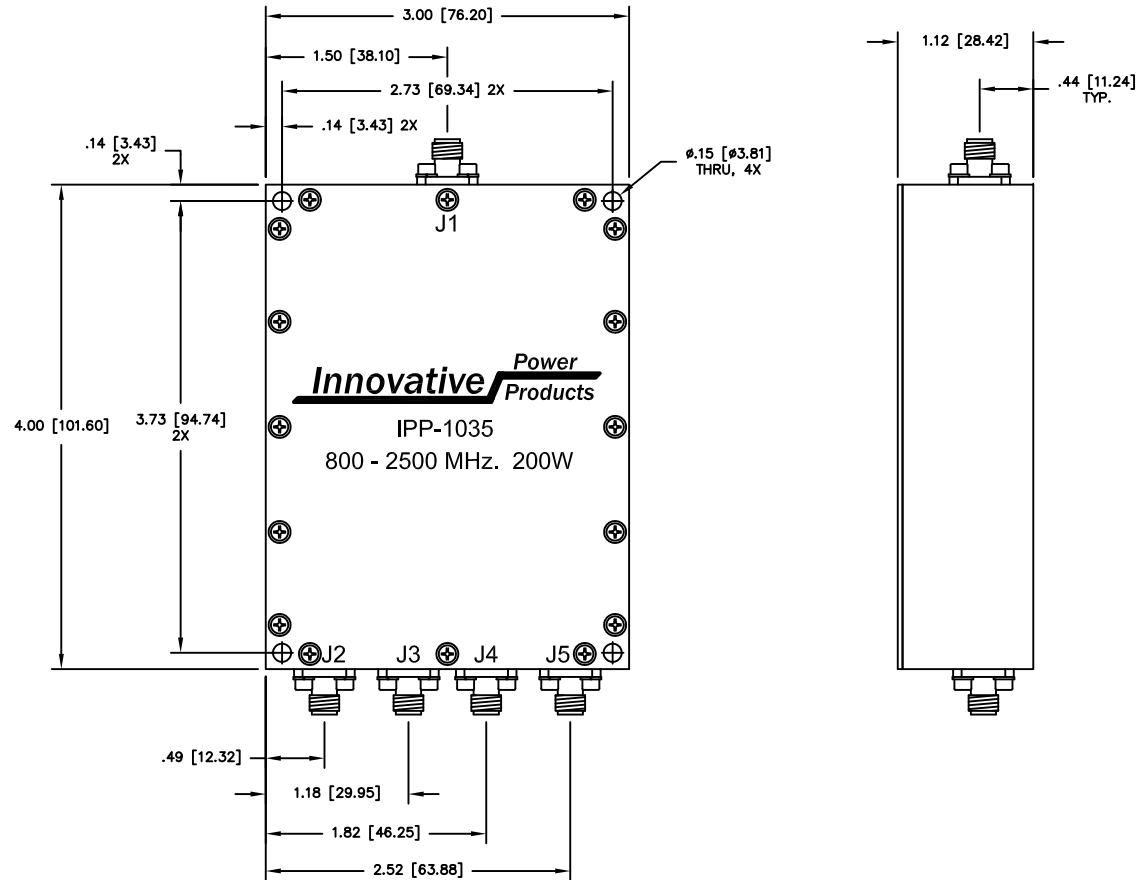

NOTES:

- CONNECTORS: J1 - J5 TYPE "SMA" FEMALE.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	800 - 2500 MHz.
INSERTION LOSS:	< 0.60 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±5°
POWER:	200 WATT
ISOLATION:	>12 dB
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN	DG	DATE	9-08	<b>Innovative Power Products</b>
	ENG	TJD	DATE	9-08	
FINISH ELECTRODEPOSITED NICKEL PER QQ-N-290. .0003 MIN. SEMI-BRIGHT	MANUF	RR	DATE	9-08	TITLE OUTLINE 4 - WAY 800 - 2500 MHz 200 WATT
	CAGE CODE: 437R2				SIZE B
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET OF 1 1	SCALE 1:1			REV. A