


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1703	A	INITIAL RELEASE	DG	1-09

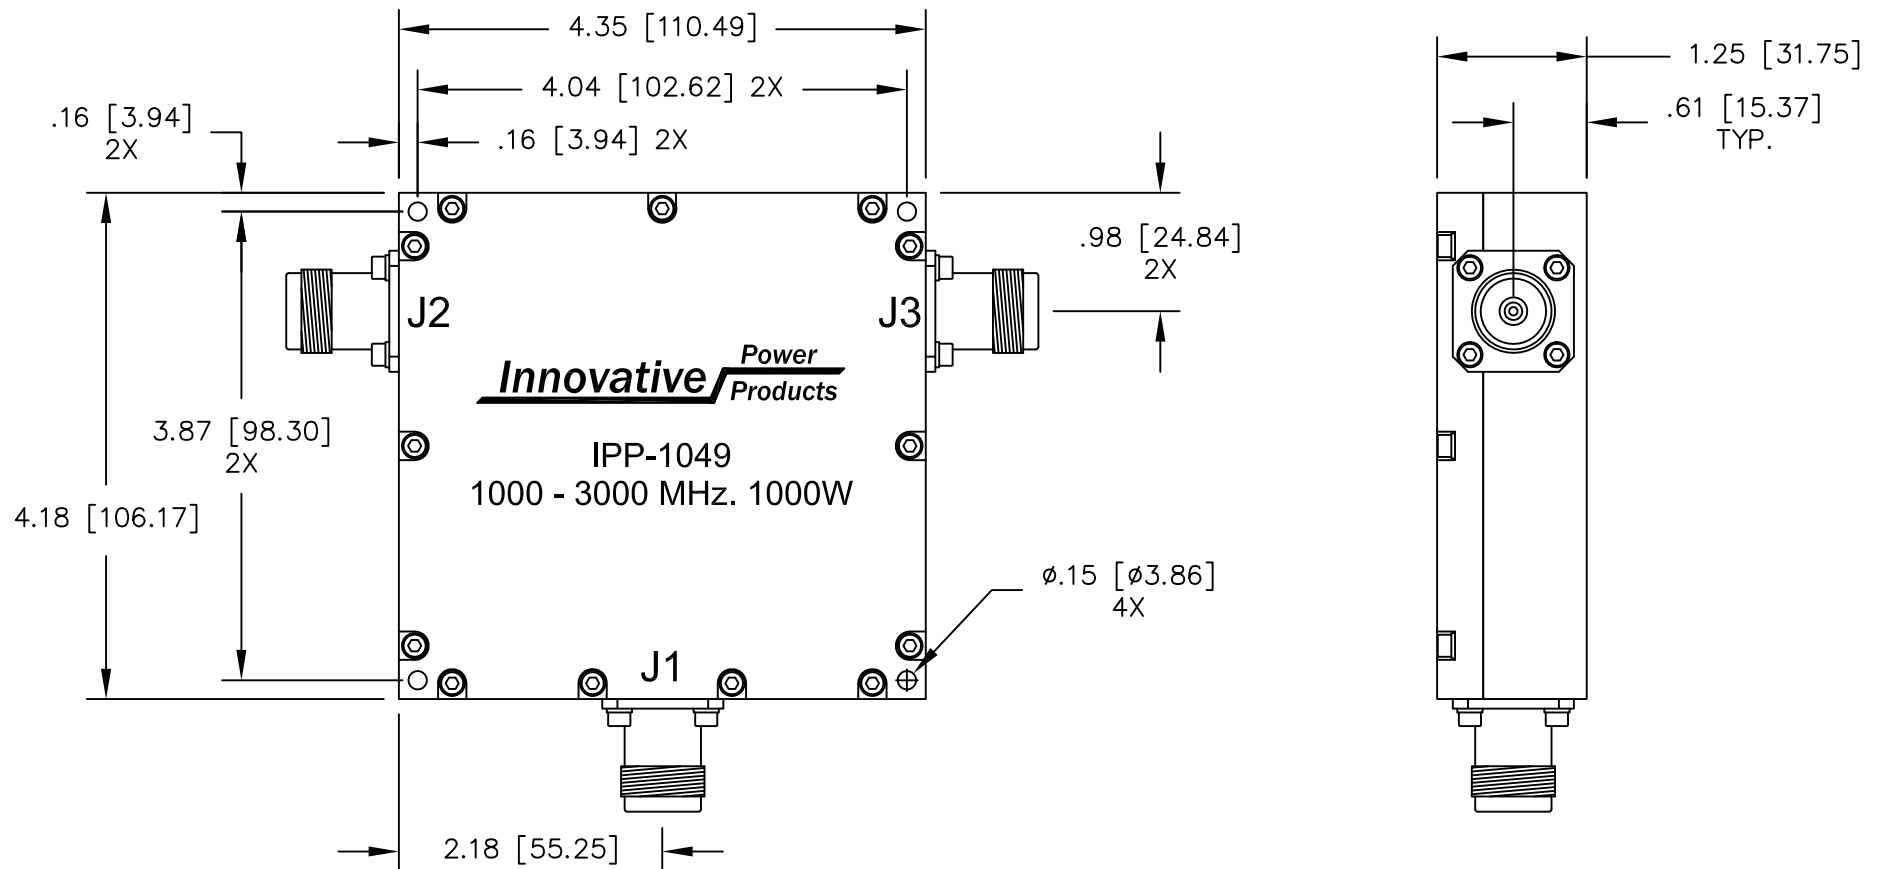

NOTES:

1. CONNECTORS: J1 - J3 TYPE "SC" FEMALE

ELECTRICAL SPECIFICATIONS

FREQUENCY: 1000 - 3000 MHz.
 INSERTION LOSS: < 0.40 dB
 VSWR: < 1.30:1
 PHASE BALANCE: ±5.0°
 AMPLITUDE BALANCE: ±0.20 dB
 POWER: 1000 WATT
 TEMPERATURE: -40°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN S.Cornell	DATE 1-22-09	Innovative Power Products		
	ENG TJD	DATE 1-22-09			
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF RR	DATE 1-22-09	TITLE OUTLINE, 2-WAY COMBINER/DIVIDER 1000-3000 MHz., 1000W		
	CAGE CODE: 437R2		SIZE B	P/N IPP-1049	REV. A
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	SHEET OF 1 1	SCALE 1:1			