UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
2580	A	INITIAL RELEASE	DG	7–10

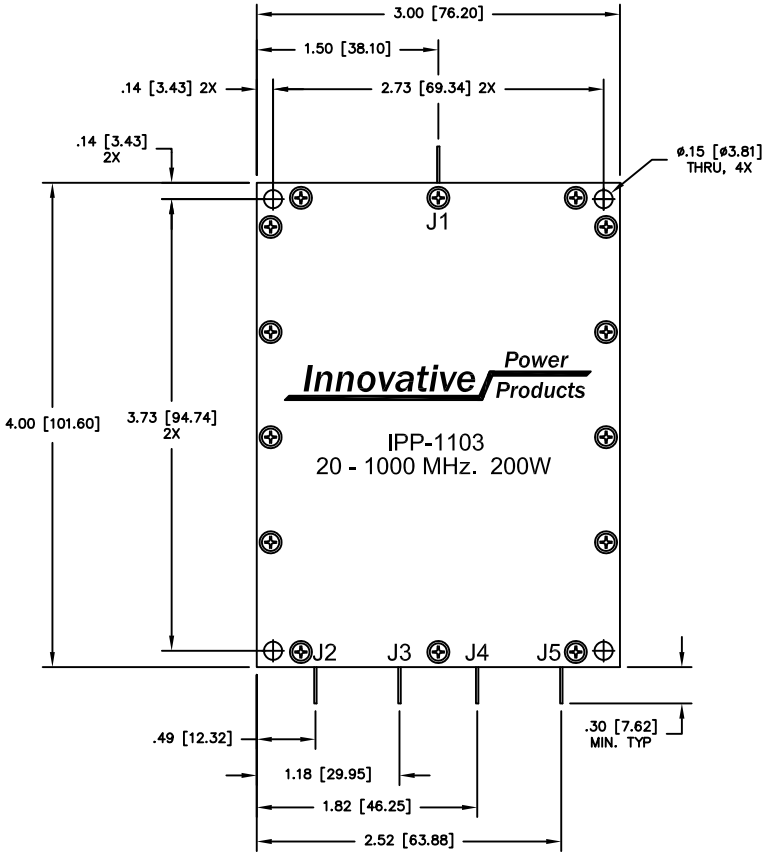

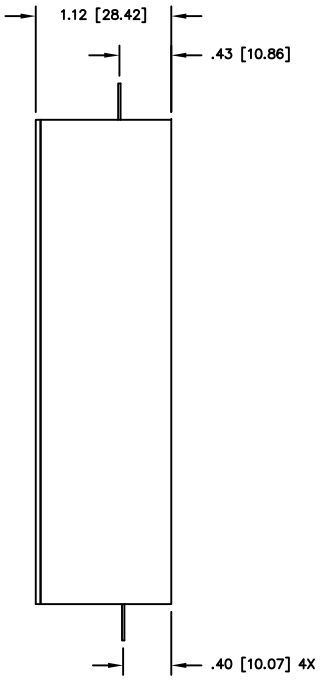

NOTES:

1. CONNECTORS: J1 – J5: .020 DIA PIN

ELECTRICAL SPECIFICATIONS

FREQUENCY:	20 – 1000 MHz.
INSERTION LOSS:	< 0.75 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±5°
AMPLITUDE BALANCE:	±0.25 dB
POWER:	200 WATT
ISOLATION:	>12 dB 20–125 MHz >15 dB 125–1000 MHz
TEMPERATURE:	–55°C TO 85°C

MATERIAL AL. ALLOY 6061-T651	DWN S.Cornell	DATE 4-30-10	Innovative Power Products
FINISH CHEM FILM CLEAR PER MIL-DTL-5541, TYPE 2, REV F, CLASS 3 ROHS COMPLIANT	ENG DG	DATE 7-10	TITLE OUTLINE 4 - WAY 20 - 1000 MHz 200 WATT
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	MANUF	DATE	
	CAGE CODE: 437R2		
	SHEET 1 OF 1	SCALE 1:1	SIZE B / P/N IPP-1103 / REV. A