


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1213	A	INITIAL RELEASE	TJD	10-06
1453	B	REVISED SPECIFICATIONS	DG	5-08

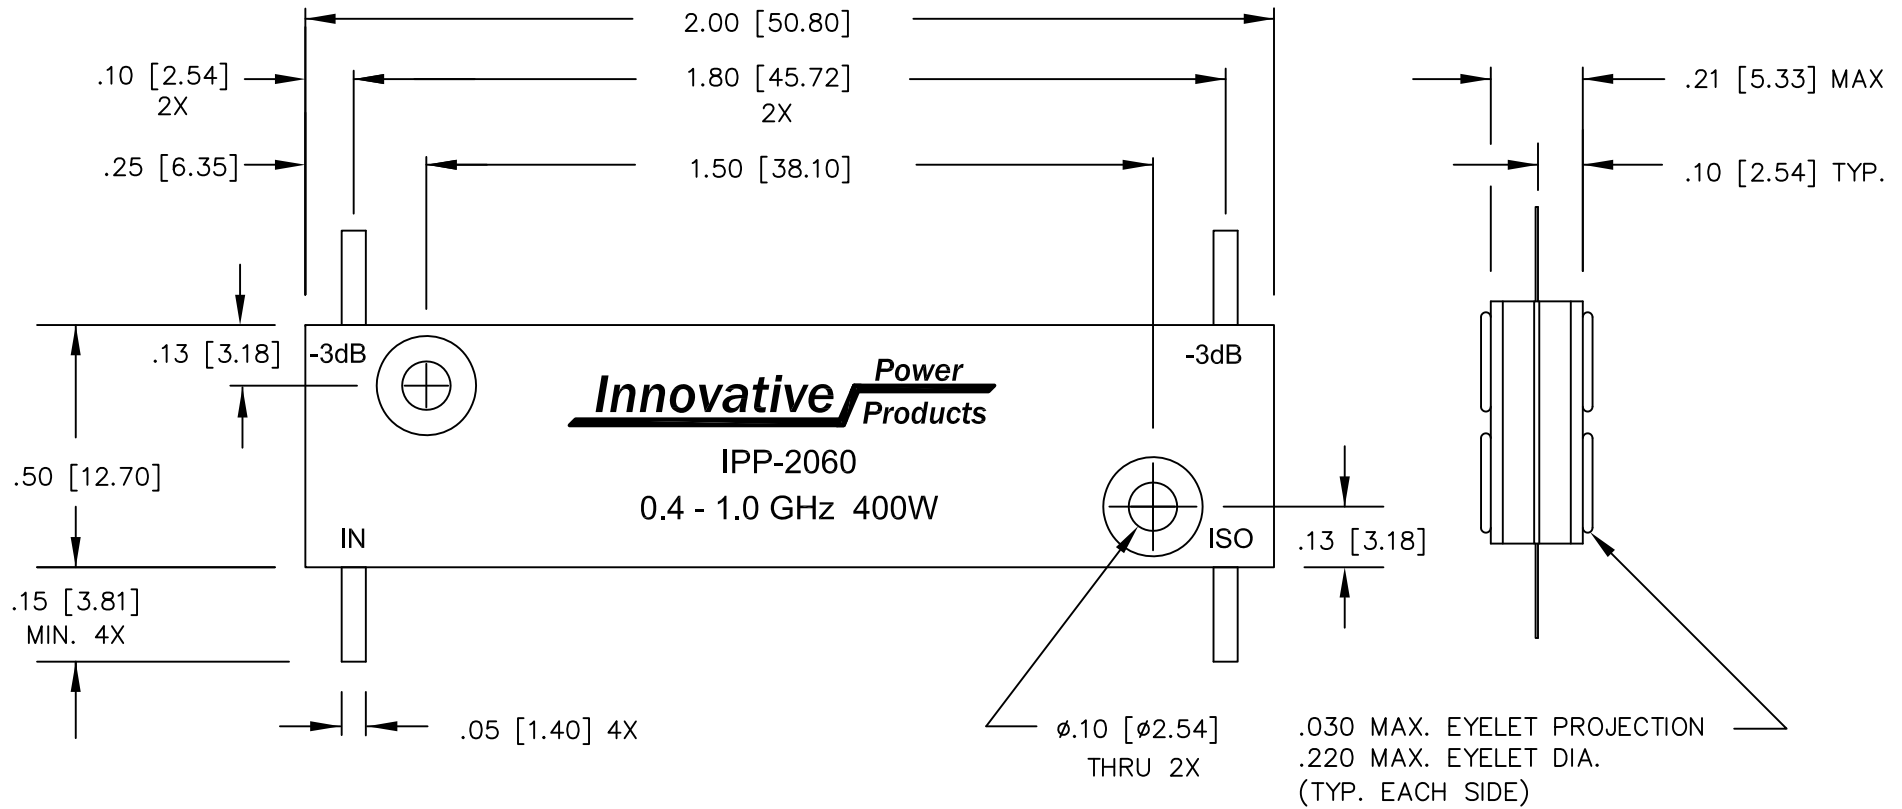

NOTES

- LEAD MATERIAL:
99.99% PURE SILVER
.005" THICK
- SEE 90° APPLICATION
NOTE FOR FURTHER
INFORMATION.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	0.4 – 1.0 GHz.
INSERTION LOSS:	< 0.25 dB
VSWR:	< 1.25:1
ISOLATION:	> 20 dB
AMPLITUDE BALANCE:	±0.70 dB
PHASE BALANCE:	±5°
POWER:	400 WATT
TEMPERATURE:	-55°C TO 85°C

PACKAGE STYLE: 22A

MATERIAL AL. ALLOY, 6061-T6	DWN	DG	DATE	10-06	Innovative Power Products	
	ENG	TJD	DATE	10-06		
FINISH CHEM FILM, CLEAR, PER MIL-C-5541, CLASS 3	MANUF	TP	DATE	10-06	TITLE OUTLINE, COUP., 90°, 0.4 - 1.0 GHz. 400W	
	CAGE CODE: 437R2					
TOLERANCE IN [MM]	.xx ±.02 [.50] .xxx ±.005 [.127] ANG. ±1/2°	SHEET 1	OF 1	SCALE 4:1	SIZE B	
					P/N IPP-2060	REV. B