


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1214	A	INITIAL RELEASE	TJD	10-06
1728	B	CHANGED TO ROHS FINISH	DG	2-09
1867	C	SEE DAR	DG	5-09

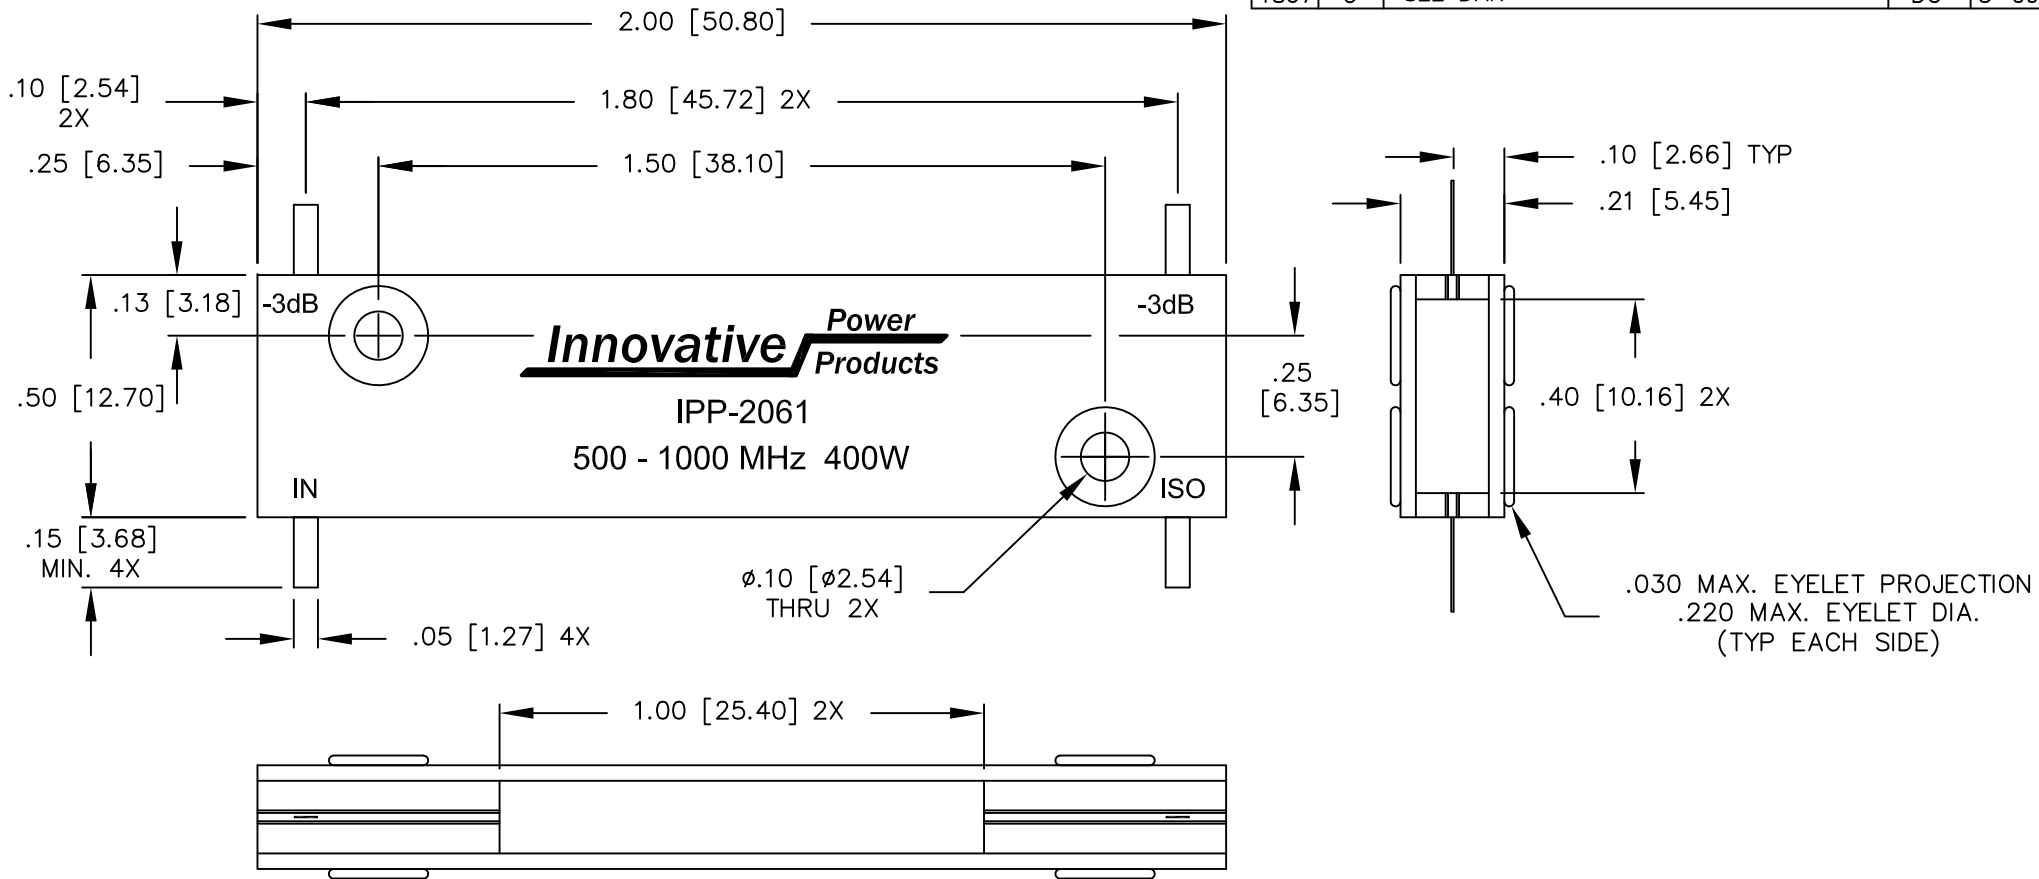

**NOTES**

- LEAD MATERIAL:  
99.99% PURE SILVER  
.005" THICK
- SEE 90° APPLICATION  
NOTE FOR FURTHER  
INFORMATION.
- RoHS COMPLIANT.

**ELECTRICAL SPECIFICATIONS**

FREQUENCY:	500 - 1000 MHz.
INSERTION LOSS:	< 0.25 dB
VSWR:	< 1.25:1
ISOLATION:	> 20 dB
AMPLITUDE BALANCE:	±0.55 dB
PHASE BALANCE:	±5°
POWER:	400 WATT
TEMPERATURE:	-55°C TO 85°C

**PACKAGE STYLE: 22A**

MATERIAL AL. ALLOY, 6061-T6	DWN	DG	DATE	10-06	<b>Innovative Power Products</b>
	ENG	TJD	DATE	10-06	
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF	TP	DATE	10-06	TITLE OUTLINE, COUP., 90°, 500 - 1000 MHz. 400W
	CAGE CODE: 437R2				
TOLERANCE IN [MM]	.XX ±.02 [.50]	.XXX ±.005 [.127]	ANG. ±1/2°	SHEET OF 1 1	SCALE 4:1
SIZE B	P/N IPP-2061	REV. C			