
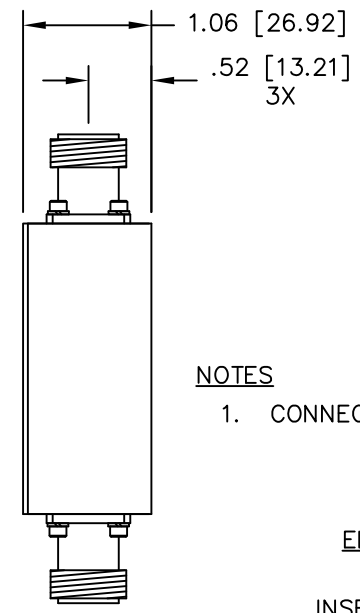


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1440	A	INITIAL RELEASE	DG	4-08
1960	B	SEE DAR	DG	7-09

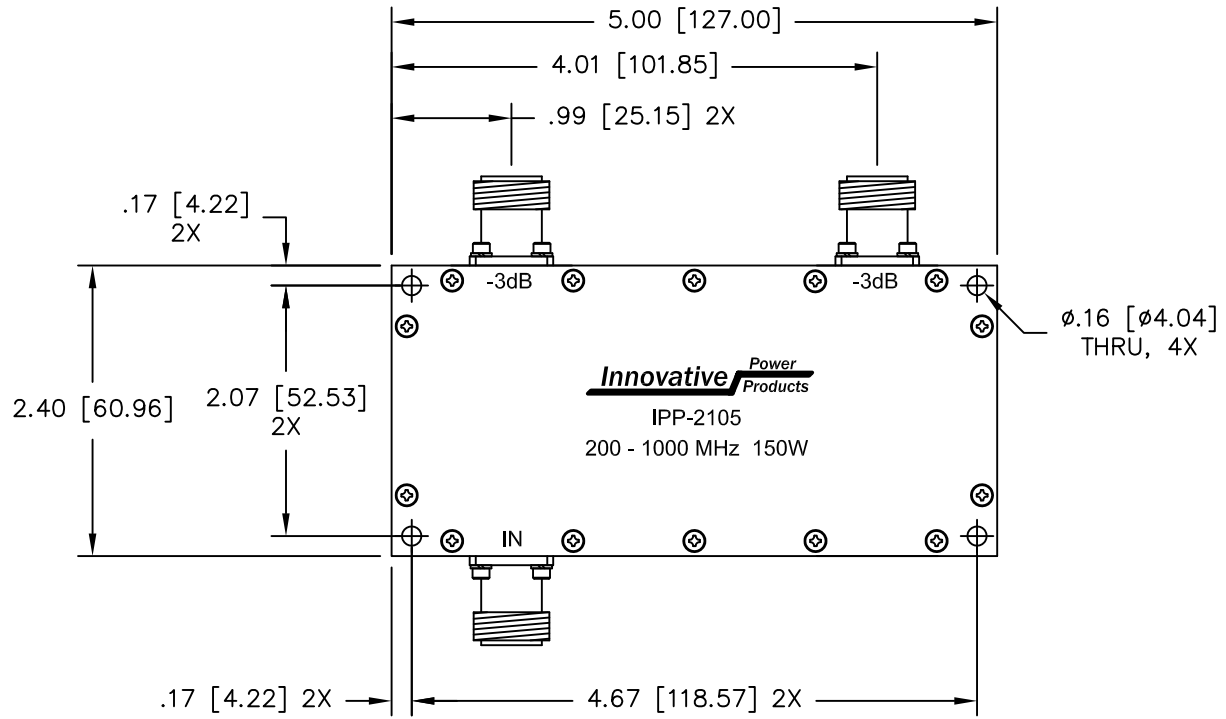

**NOTES**

- CONNECTORS: J1 - J3: TYPE "N" FEMALE

**ELECTRICAL SPECIFICATIONS**

FREQUENCY:	200-1000 MHz.
INSERTION LOSS:	< 0.65 dB
VSWR:	< 1.30:1
ISOLATION:	> 16 dB
AMPLITUDE BALANCE:	±0.75 dB
PHASE BALANCE:	±5°
POWER:	150 WATT
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY, 6061-T6	DWN DG	DATE 4-08			
	ENG TJD	DATE 4-08			
FINISH CHEM FILM CLEAR PER MIL-DTL-5541, TYPE 2, REV F, CLASS 3 ROHS COMPLIANT	MANUF TP	DATE 4-08	TITLE OUTLINE, COUP., 90°, 200 - 1000 MHz, 150W		
	TOLERANCE .XX ±.02 [.50] IN [MM] .XXX ±.005 [.127] ANG. ±1/2°		CAGE CODE: 437R2	SIZE B	P/N IPP-2105
		SHEET OF 1 1	SCALE 1:1		