


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1695	A	INITIAL RELEASE	DG	1-09

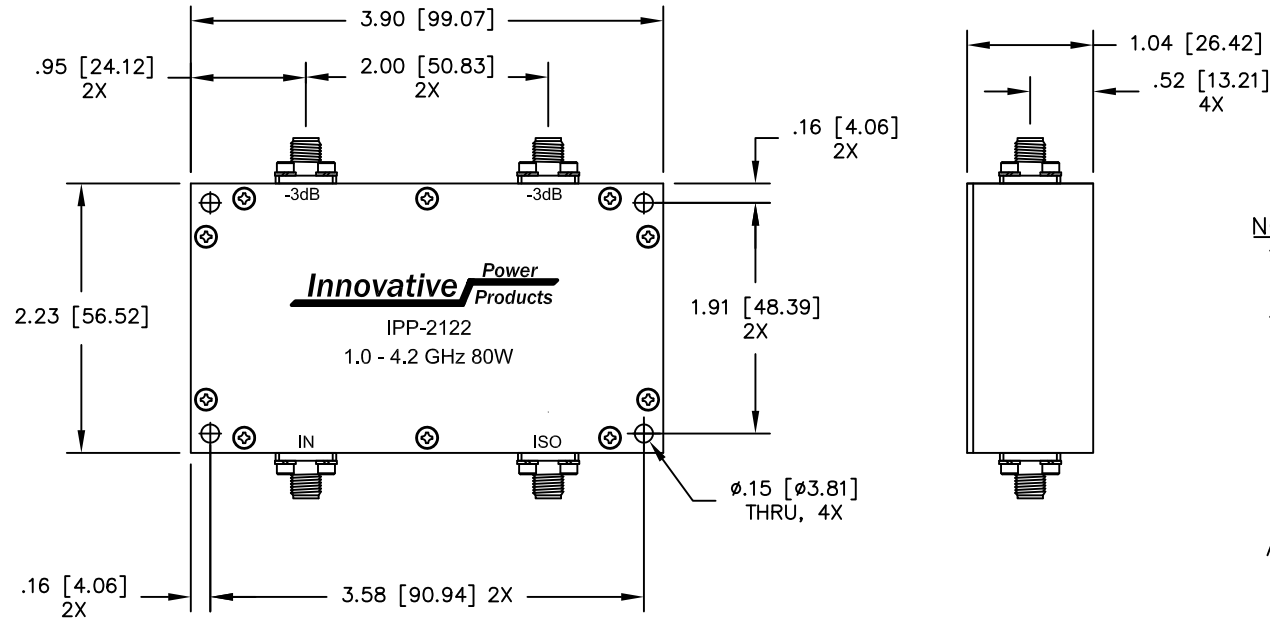

**NOTES**

- CONNECTORS: TYPE "SMA" FEMALE.
- SEE 90° APPLICATION NOTE FOR FURTHER INFORMATION.

**ELECTRICAL SPECIFICATIONS**

FREQUENCY:	1.0-4.2 GHz.
INSERTION LOSS:	< 0.60 dB
VSWR:	< 1.30:1
ISOLATION:	> 18 dB
AMPLITUDE BALANCE:	±0.50 dB
PHASE BALANCE:	±5°
POWER:	80 WATT
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY, 6061-T6	DWN S.Cornell	DATE 7-22-08			
	ENG TJD	DATE 7-22-08			
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF TP	DATE 7-22-08	TITLE OUTLINE, COUP., 90°, 1.0 - 4.2 GHz. 80W		
	CAGE CODE: 437R2		SIZE B	P/N IPP-2122	REV. A
TOLERANCE IN [MM]	.XX ±.02 [.50] .XXX ±.005 [.127] ANG. ±1/2°	SHEET OF 1 1	SCALE 1:1		