


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
2062	A	INITIAL RELEASE	DG	10-09
2460	B	SEE DAR	DG	5-10

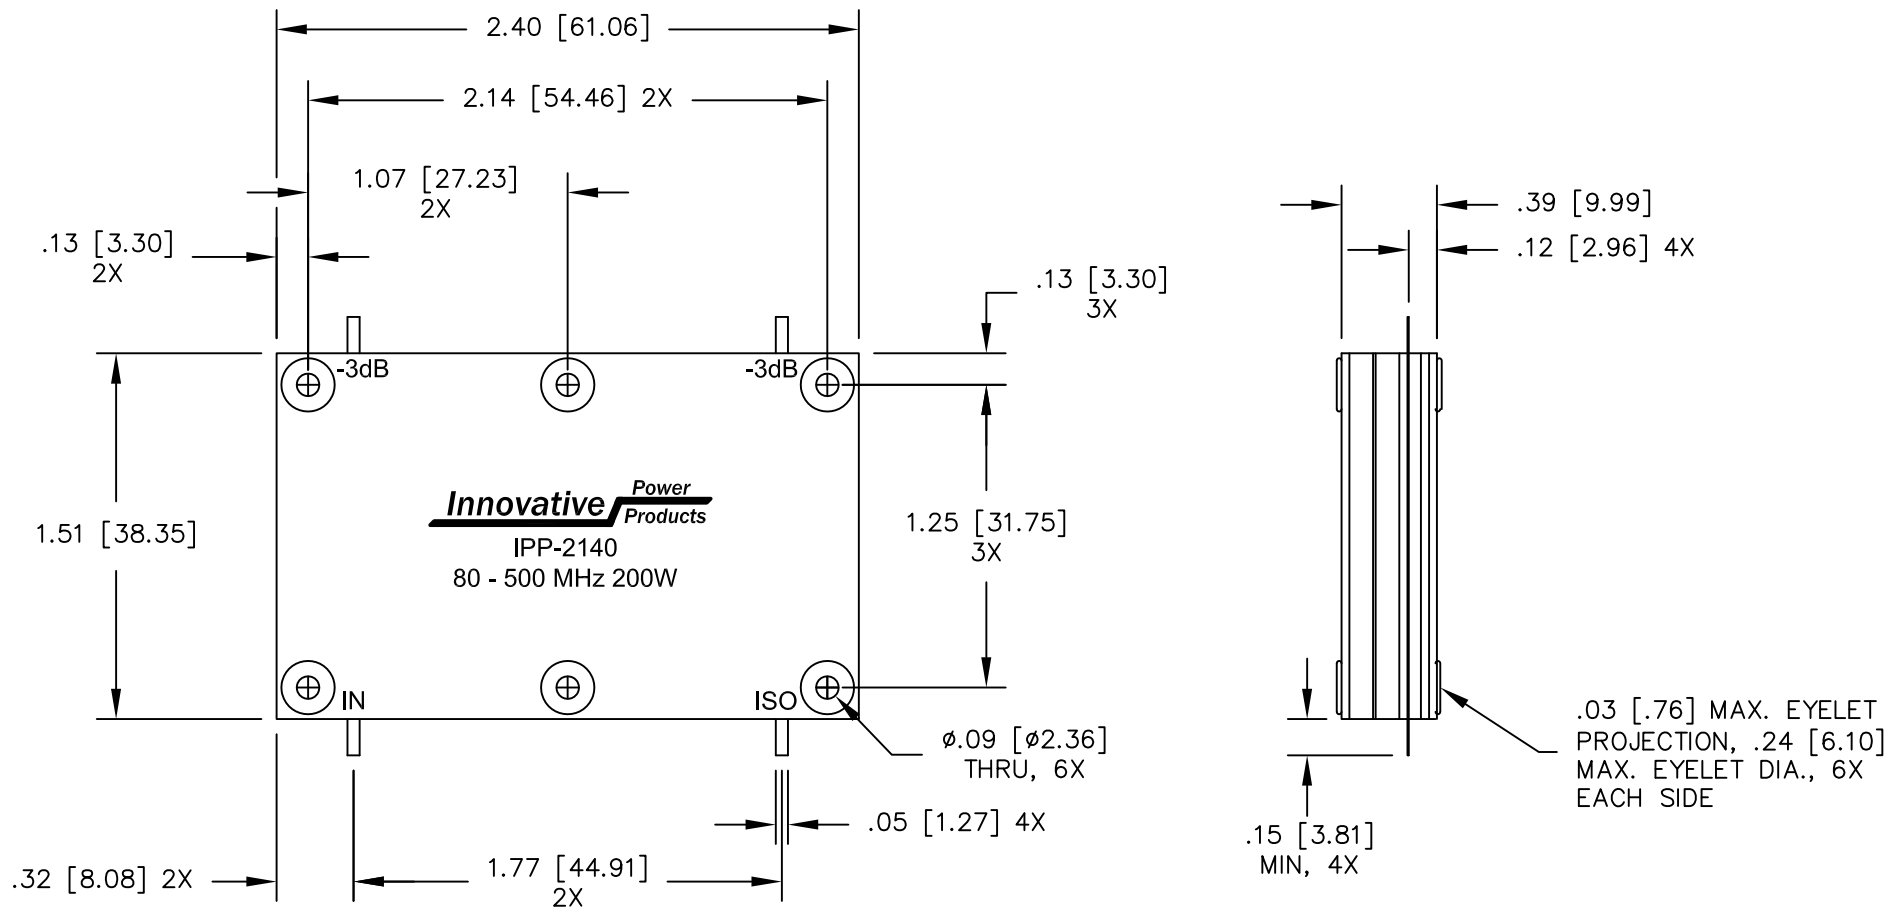

NOTES

1. LEAD MATERIAL:
99.99% PURE SILVER
.005" THICK
2. SEE 90° APPLICATION
NOTE FOR FURTHER
INFORMATION.
3. RoHS COMPLIANT

ELECTRICAL SPECIFICATIONS

FREQUENCY:	80 - 500 MHz.
INSERTION LOSS:	< 0.6 dB
VSWR:	< 1.30:1
ISOLATION:	> 16 dB
AMPLITUDE BALANCE:	±0.75 dB
PHASE BALANCE:	±6°
POWER:	200 WATT
TEMPERATURE:	-55°C TO 85°C

MATERIAL AL. ALLOY, 6061-T6	DWN	DG	DATE	11-08	Innovative Power Products		
	ENG	TJD	DATE	11-08			
FINISH CHEM FILM, CLEAR, PER MIL-DTL-5541, TYPE 2, REV. F, CLASS 3 (ROHS COMPLIANT)	MANUF	TP	DATE	11-08	TITLE OUTLINE, COUP., 90°, 80 - 500 MHz. 200W		
	CAGE CODE: 437R2						
TOLERANCE	.xx ±.02 [.50]	SHEET OF 1 1	SCALE 2:1	SIZE B	P/N IPP-2140	REV. B	
IN [MM]	.xxx ±.005 [.127] ANG. ±1/2°						