



UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1091	A	INITIAL RELEASE	TJD	4-06

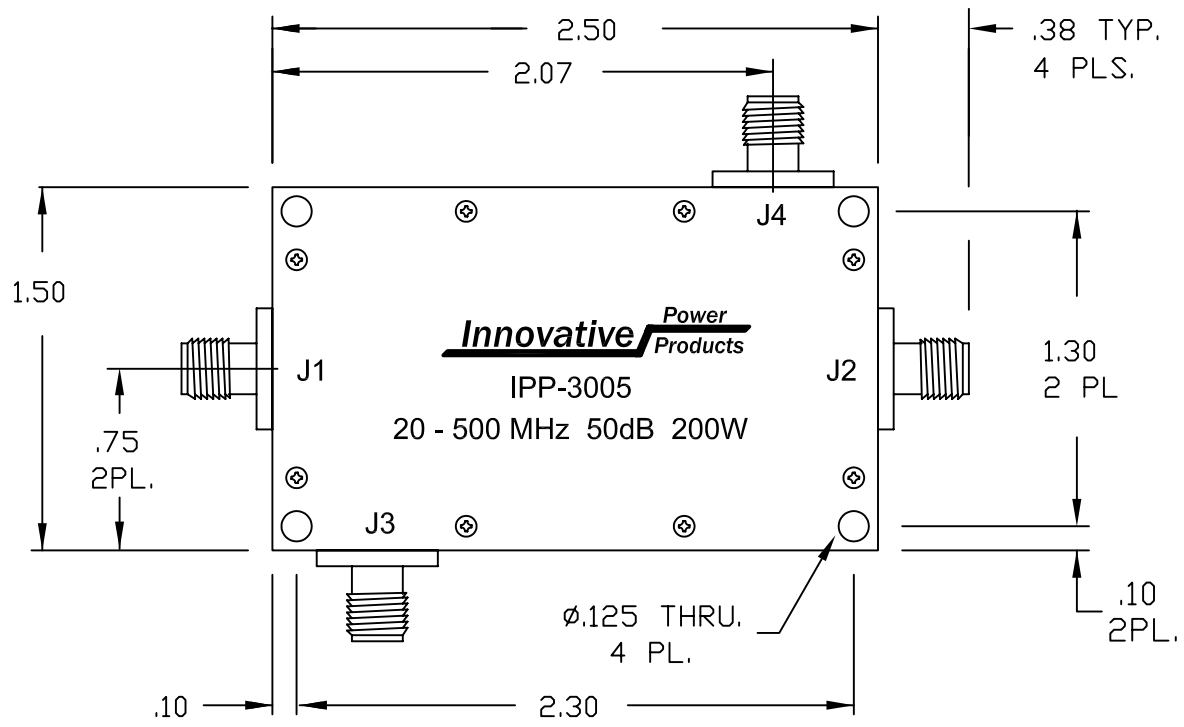

NOTES
1. CONNECTOR TYPE J1 - J4: TYPE SMA

ELECTRICAL SPECIFICATIONS
 FREQUENCY: 20 - 500 MHz.
 INSERTION LOSS: 0.30 dB MAX.
 VSWR: 1.25:1 MAX.
 COUPLING: 50.0 ±1.0dB
 DIRECTIVITY: >20dB
 COUPLED FLATNESS: ±0.50dB MAX.
 POWER: 200 WATT

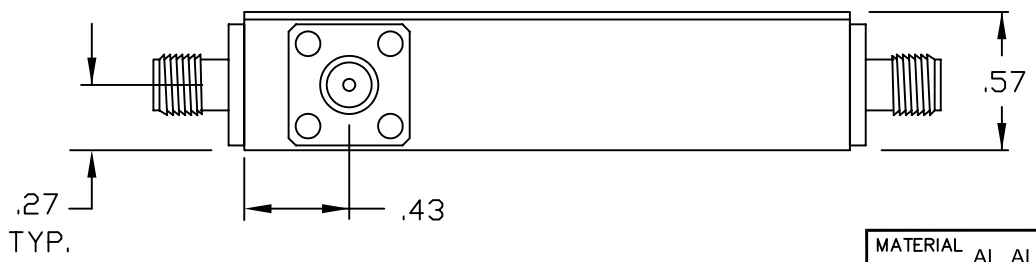

MATERIAL AL. ALLOY 6061-T651	DWN DG	DATE 4/06	Innovative <i>Power</i> Products
	ENG TJD	DATE 4/06	
FINISH CHEM FILM CLEAR IRRIDITE	MANUF TP	DATE 4/06	TITLE DUAL DIRECTIONAL COUPLER 20 - 500 MHz. 200 WATT, 50 dB
	CAGE CODE: 437R2		P/N IPP-3005
TOLERANCE .XX ±.02 .XXX ±.005 ANG. ±1/2°	SHEET OF 1 1	SCALE 4:1	