


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1092	A	INITIAL RELEASE	TJD	4-06
1233	B	CHANGE MOUNTING HOLES	TJD	11-06

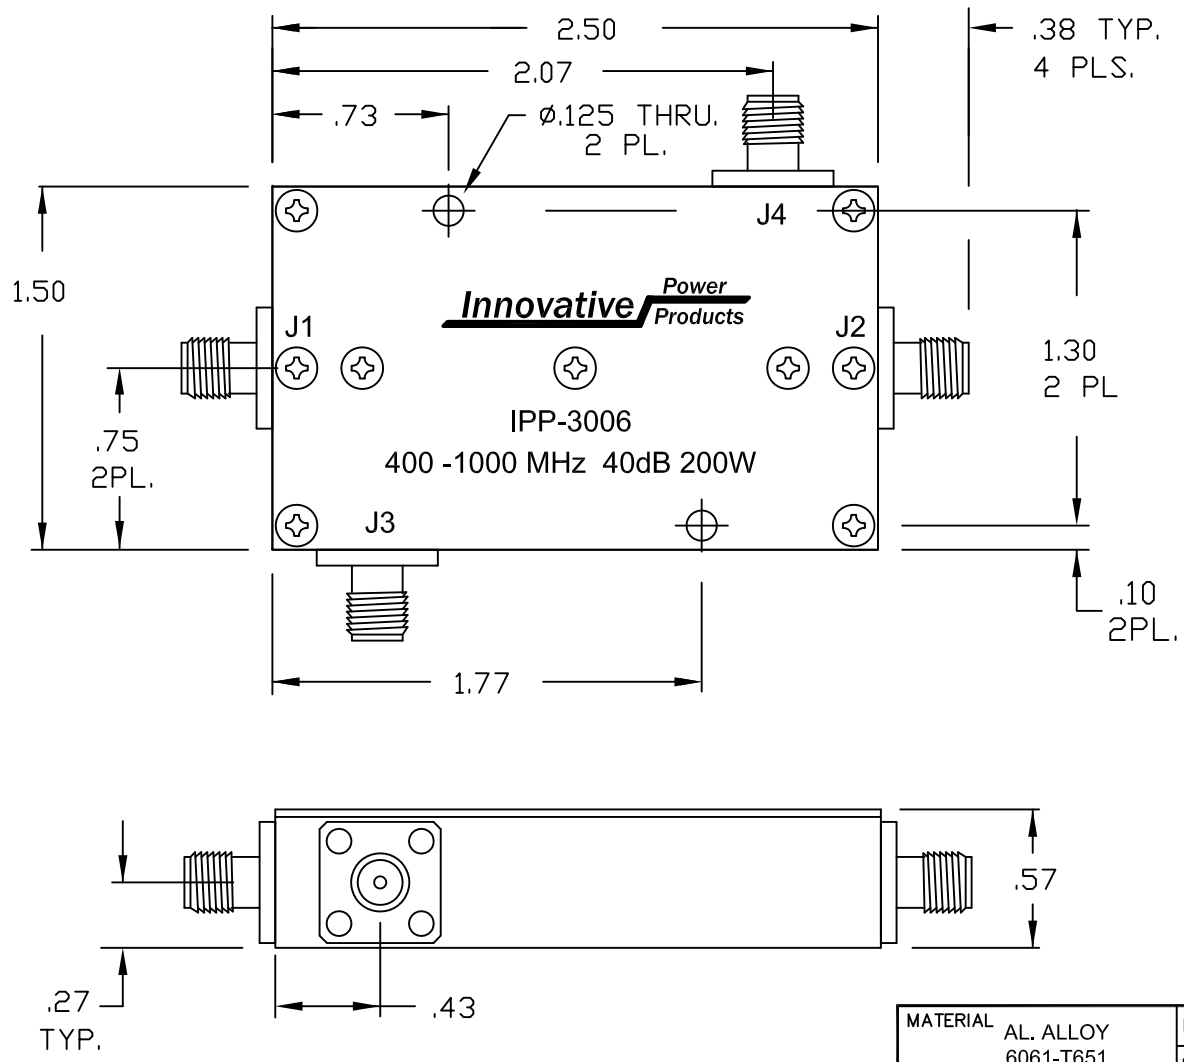

NOTES

1. CONNECTOR TYPE J1 - J4: TYPE SMA

ELECTRICAL SPECIFICATIONS

FREQUENCY: 400 - 1000 MHz.
 INSERTION LOSS: 0.25dB MAX.
 VSWR: 1.25:1 MAX.
 COUPLING: 40.0 ±1.0dB
 DIRECTIVITY: >20dB
 COUPLED FLATNESS: ±0.50dB MAX.
 POWER: 200 WATT

MATERIAL	AL. ALLOY	DWN	DG	DATE	4/06	Innovative Power Products
	6061-T651	ENG	TJD	DATE	4/06	
FINISH	CHEM FILM	MANUF	TP	DATE	4/06	TITLE DUAL DIRECTIONAL COUPLER 400 - 1000 MHz. 200 WATT, 40 dB
	CLEAR IRRIDITE	CAGE CODE: 437R2				
TOLERANCE	.XX ±.02	SHEET OF	1 1	SCALE	4:1	P/N IPP-3006
	.XXX ±.005					
	ANG. ±1/2°					