



UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1352	A	INITIAL RELEASE, UPDATED TOP VIEW	DG	11-07
1352	B	HOLE TO HOLE DIMENSION WAS 1.040	DG	11-07

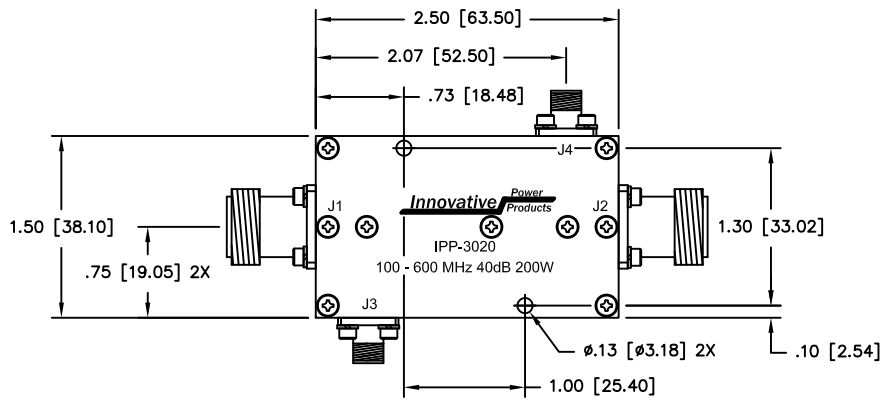

NOTES

- CONNECTOR TYPE J1 - J2: TYPE "N" FEMALE
J3 - J4: TYPE SMA FEMALE

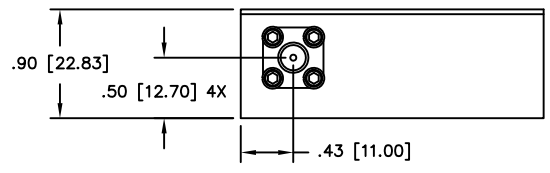

ELECTRICAL SPECIFICATIONS

- FREQUENCY: 100 - 600 MHz.
- INSERTION LOSS: <0.30 dB
- VSWR: <1.25:1
- COUPLING: 40.0dB ±1.0dB
- DIRECTIVITY: >20dB
- COUPLED FLATNESS: ±0.50dB
- POWER: 200 WATT

MATERIAL	AL. ALLOY	DWN	DG	DATE	7-07	Innovative <i>Power</i> Products
	6061-T651	ENG	TJD	DATE	7-07	
FINISH	CHEM FILM	MANUF	TP	DATE	7-07	TITLE
	CLEAR IRRIDITE					DUAL DIRECTIONAL COUPLER 100 - 600 MHz. 200 WATT, 40 dB
TOLERANCE	.XX ±.02	CAGE CODE: 437R2		SHEET OF	SCALE	P/N
	.XXX ±.010	1	1			
	ANG. ±1/2°					REV.
						B