



UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1352	A	INITIAL RELEASE, UPDATED TOP VIEW	DG	11-07

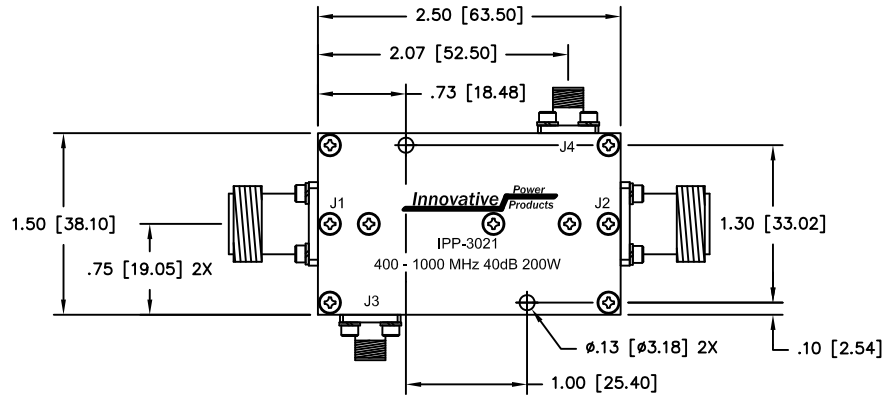

NOTES

- CONNECTOR TYPE J1 - J2: TYPE "N" FEMALE  
J3 - J4: TYPE SMA FEMALE

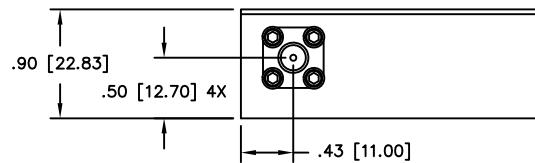

ELECTRICAL SPECIFICATIONS

FREQUENCY:	400 - 1000 MHz.
INSERTION LOSS:	<0.30 dB
VSWR:	<1.25:1
COUPLING:	40.0dB ±1.0dB
DIRECTIVITY:	>20dB
COUPLED FLATNESS:	±0.50dB
POWER:	200 WATT

MATERIAL	AL. ALLOY 6061-T651	DWN DG	DATE 7-07		
	FINISH	CHEM FILM CLEAR IRRIDITE	ENG TJD		DATE 7-07
TOLERANCE		.XX ±.02 .XXX ±.010 ANG. ±1/2°	MANUF TP	DATE 7-07	TITLE
			CAGE CODE: 437R2		P/N
		SHEET OF 1 1	SCALE 1:1		REV. A