


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1453	A	INITIAL RELEASE	DG	6-08
1524	B	ADDED 2 GROUND TABS	DG	9-08

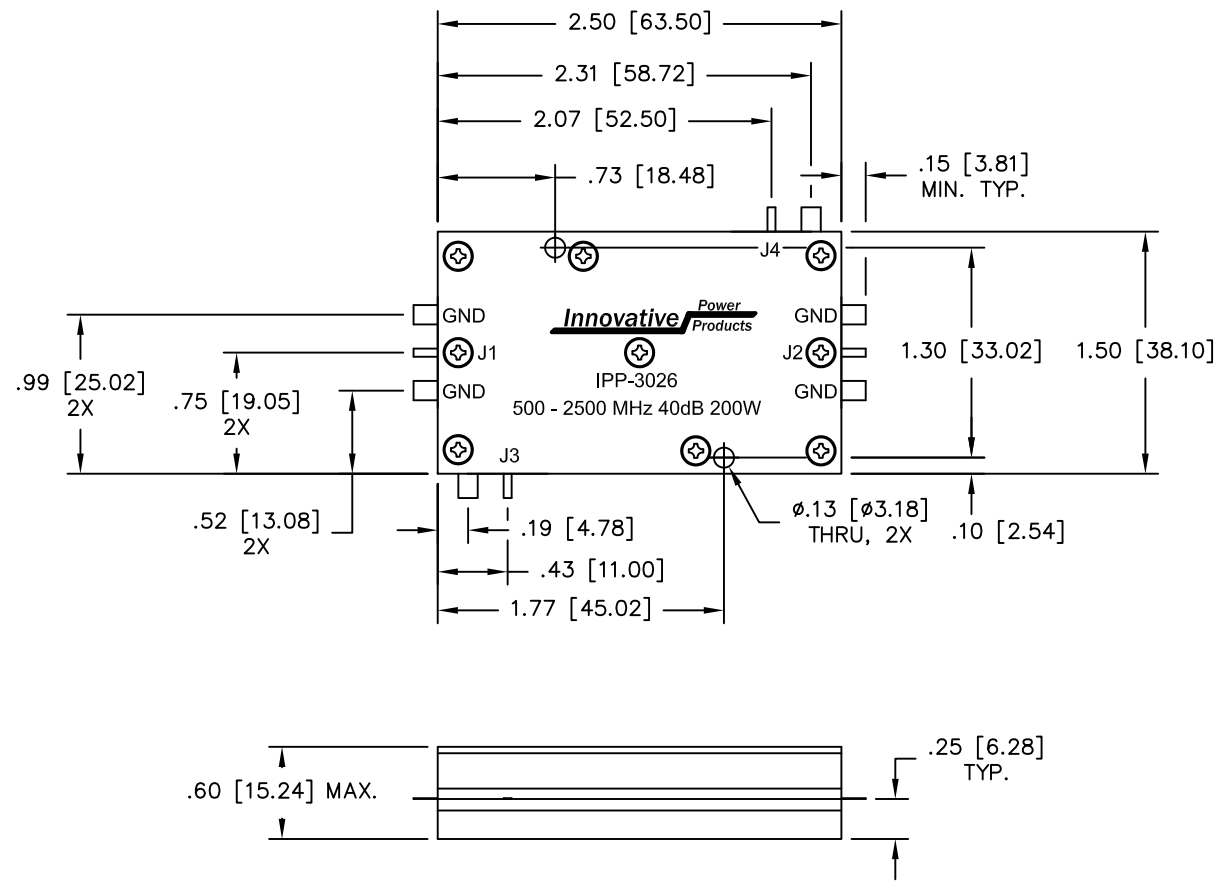

**NOTES**

- J1 - J4: 0.050 X 0.005 SILVER TABS  
GND: 0.120 X 0.005 SILVER TABS

**ELECTRICAL SPECIFICATIONS**

- FREQUENCY: 500 - 2500 MHz.
- INSERTION LOSS: <0.25dB
- VSWR: <1.25:1
- COUPLING: 40.0 ±1.0dB
- DIRECTIVITY: > 18dB
- COUPLED FLATNESS: ±0.50dB
- POWER: 200 WATT

MATERIAL	AL. ALLOY	DWN	DG	DATE	8-07	<b>Innovative Power Products</b>		
	6061-T651	ENG	TJD	DATE	8-07			
FINISH	CHEM FILM	MANUF	TP	DATE	8-07		TITLE	
	CLEAR IRRIDITE	CAGE CODE: 437R2			DUAL DIRECTIONAL COUPLER			
TOLERANCE	.XX ±.02	SHEET OF	1 1	SCALE	.75:1	P/N	IPP-3026	REV.
	.XXX ±.010							
	ANG. ±1/2°							