


UNAUTHORIZED USE OF THIS  
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1323	A	INITIAL RELEASE	TJD	8-07
1497	B	CHANGE LD HEIGHT & HEIGHT DIMS	DG	11-08

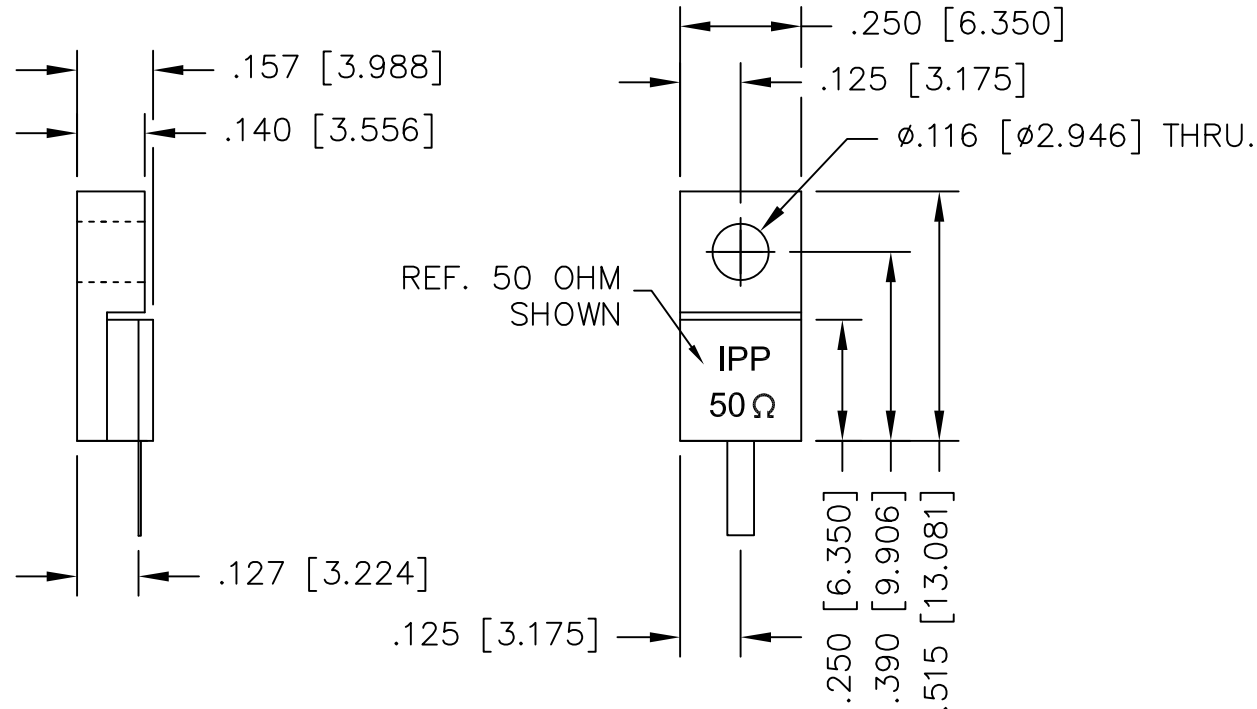


**NOTES**

- LEAD MATERIAL:  
99.99% PURE SILVER,  
.040 WIDE x .005 THICK
- LEAD LENGTH: .150 MIN.
- SUBSTRATE MATERIAL: BeO  
COVER MATERIAL: Al<sub>2</sub>O<sub>3</sub>
- FLANGE MATERIAL: COPPER  
PLATING: NICKEL

**ELECTRICAL SPECIFICATIONS**

INPUT POWER: 100 WATT  
 FREQ: DC - 5.0 GHZ.  
 VSWR: 1.10:1 DC - 4.2 GHZ.  
 1.25:1 DC - 5 GHZ.

**POWER DERATING CURVE**

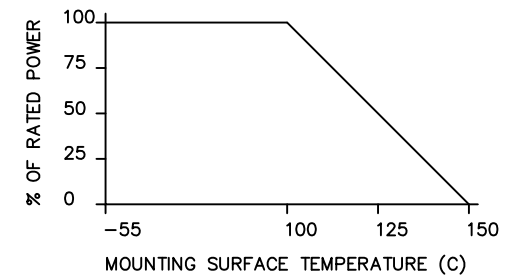

PART NO.	VALUE	TOLERANCE
IPP-TB221C-50	50 OHMS	+/- 5%
IPP-TB221C-100	100 OHMS	+/- 5%

MATERIAL [3] [4]	DWN DG	DATE 8-07	<b>Innovative Power</b> <b>Products</b>
	ENG TJD	DATE 8-07	
FINISH [4]	MANUF TP	DATE 8-07	TITLE TERMINATION, 100 WATT, FLANGE
	CAGE CODE: 437R2		P/N IPP-TB221C-XXX
TOLERANCE .XX ±.02 [.50] IN [MM] .XXX ±.010 [.254]	SHEET OF 1 1	SCALE 4:1	REV. B