



UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
1207	A	INITIAL RELEASE	TJD	10-06

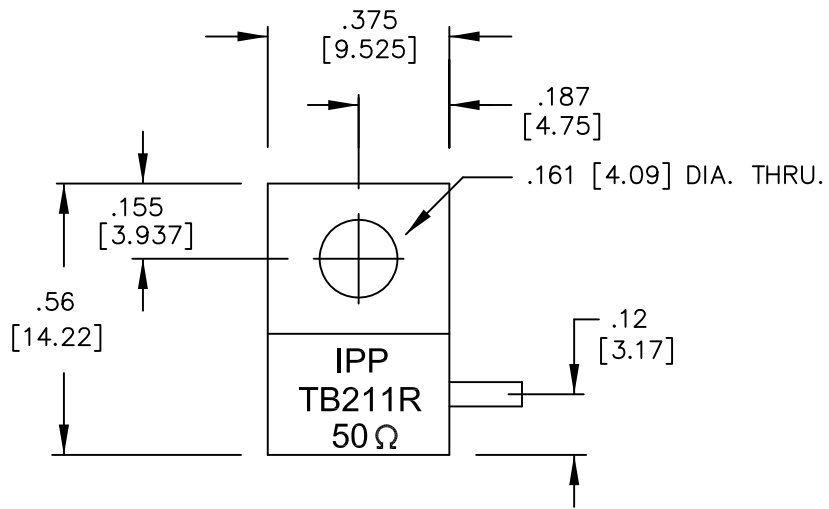

(REF: 50 OHM VALUE SHOWN)

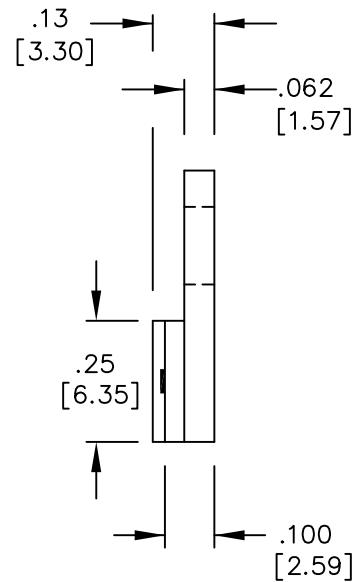


NOTES

- LEAD MATERIAL:
99.99% PURE SILVER,
.050 WIDE x .005 THICK
- LEAD LENGTH: .150 MIN.
- SUBSTRATE MATERIAL: BeO
COVER MATERIAL: Al₂O₃
- FLANGE MATERIAL: COPPER
PLATING: NICKEL
- DIMENSIONS: INCHES, [mm]

ELECTRICAL SPECIFICATIONS

INPUT POWER: 100 WATT
 FREQ: DC - 3.0 GHZ.
 VSWR: 1.25:1 DC - 2 GHZ.
 1.30:1 DC - 3 GHZ.

POWER DERATING CURVE

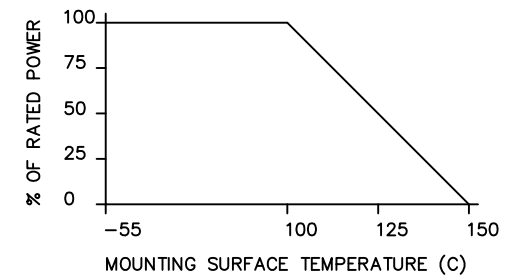

PART NO.	VALUE	TOLERANCE
IPP-TB211R-50	50 OHMS	+/- 5%
IPP-TB211R-100	100 OHMS	+/- 5%

MATERIAL [3] [4]	DWN DG	DATE 10-06	
	ENG TJD	DATE 10-06	
FINISH [4]	MANUF TP	DATE 10-06	TITLE TERMINATION, 100 WATT, FLANGE
	CAGE CODE: 437R2		P/N IPP-TB211R-XXX
TOLERANCE IN [MM]	.XX ±.02 [.50] .XXX ±.010 [.254]	SHEET OF 1 1	SCALE 2:1
			REV. A